



NATIONAL DISTRIBUTOR OF QUALITY
MAINTENANCE SUPPLIES SINCE 1958

PREMIUM

Premium Penetrating Lube w/PTFE

This advanced technology 4-n-1 product is made for high performance in a nondrying oily film penetrating lubricant. The 4-n-1 action makes it highly versatile with the ability to penetrate, lubricate, displace moisture, and provide superior resistance to corrosion. The ultra low surface tension quickly and easily penetrates deep to free frozen parts and assemblies. The next generation chemistry contains NO chlorinated solvents or ozone depleters, has a flash point of 175°F with CO2 propellant and a 360° spray valve for easy use in any position. It is also nonconductive to 19,000 volts for use around live equipment. The non-aggressive formula is safe for use on most plastics and painted surfaces making it an excellent choice for virtually any general-purpose lubrication need even in excess of 500° F. Meets or exceeds MIL-C-23411A, MIL-C-81309D-Type III, MIL-C-18171D-Grade 3, and Federal Specifications VV-P2166C-Type I and A-A-50493-Type I.

Benefits:

- Penetrates, Lubricates, Displaces Moisture, Resists Corrosion
- Environmentally Preferable Formula
- High Flash Point (over 175°F)
- 360° Valve Allows Can to Spray Upside Down

Applications:


- Industrial and institutional settings
- Bearings
- Bolts
- Chains
- Conveyors
- Hinges
- Corroded Fasteners
- Nuts
- Pulleys

Specifications:

Physical Form	Mist
Odor	Solvent
Color	Tan
% VOC by Weight	3.7
Flammability per CPSC	Extremely Flammable
pH	N/A
NFPA Code 30B Storage Level	1
Net Weight	12 oz

Packaging Information:

SKU	Package Quantity	Weight (lbs)	Length (")	Height (")	Width (")
8302	12-16oz cans/case	13	11.5	8.56	8.5

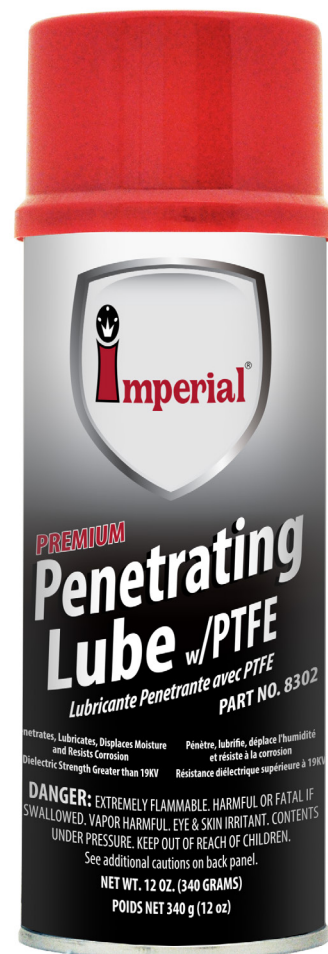

Part No. 8302

HMIS Hazard Code:	
2	Health
3	Flammability
0	Reactivity
B	Personal Protection

Hazard Rating: 0 = minimal, 1 = slight,
2 = moderate, 4 = extreme